Low forward voltage Schottky Barrier Rectifier

SR3L20 THRU SR3L200 20 to 200v 3.0A

RoHS COMPLIANT


FEATURES

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICALDATA

- Case: Molded plastic
- Epoxy: UL 94V-O rate flame retardant
- Lead: Axial leads, solder able per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode end

DO-15(DO-204AC)

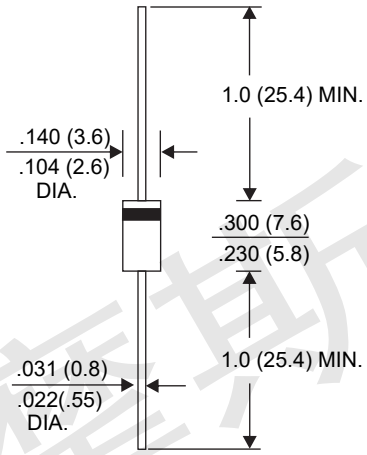

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	SR3L20	SR3L40	SR3L60	SR3L80	SR3L10	SR3L120	SR3L150	SR3L200	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3.0								A
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	80								A
Max Instantaneous Forward Voltage at 3 A	V_F	0.49		0.60	0.67			0.78		V
Maximum DC Reverse Current T_a = 25°C at Rated DC Reverse Voltage T_a =100°C	I_R	0.5 5			0.3 3					mA
Typical Junction Capacitance (1)	C_j	450			400					pF
Typical Thermal Resistance (2)	$R_{\theta JA}$	65								°C/W
Operating Junction Temperature Range	T_j	-55 ~ +150								°C
Storage Temperature Range	T_{stg}	-55 ~ +150								°C

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

苏州福摩斯

Low forward voltage Schottky Barrier Rectifier

SR3L20 THRU SR3L200 20 to 200v 3.0A

RoHS COMPLIANT

RATINGS AND CHARACTERISTIV CURVES

Fig.1 Forward Current Derating Curve

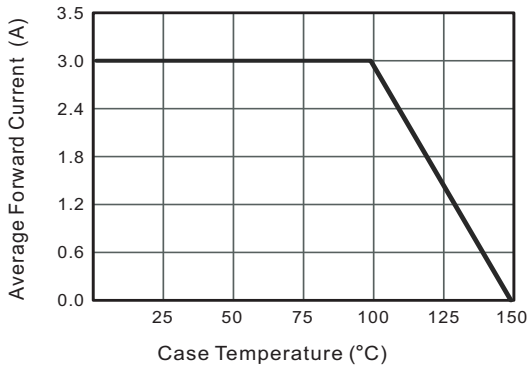


Fig.2 Typical Reverse Characteristics

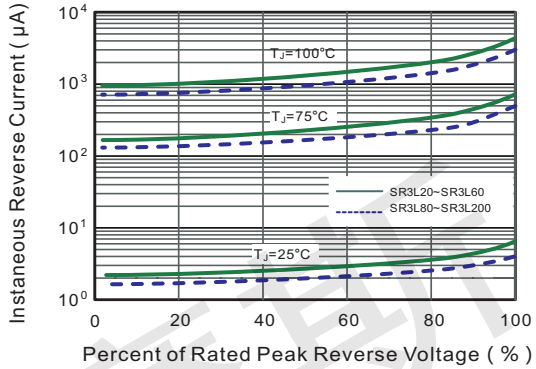


Fig.3 Typical Forward Characteristic

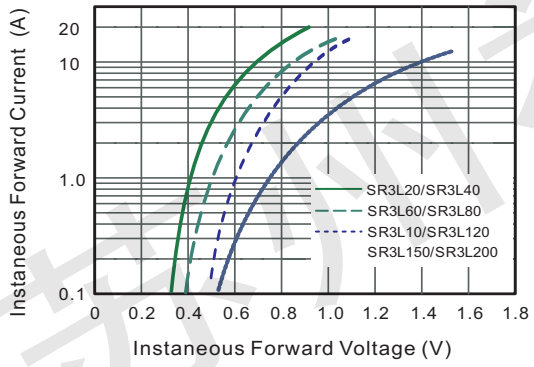


Fig.4 Typical Junction Capacitance

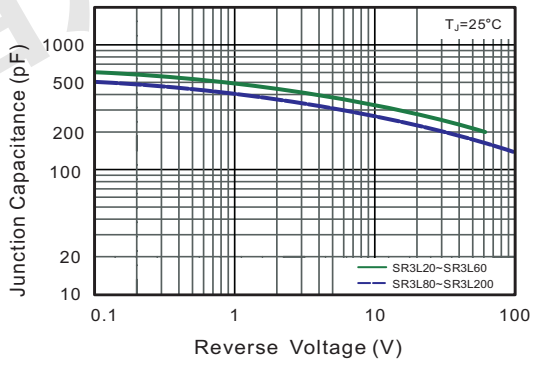


Fig.5 Maximum Non-Repetitive Peak Forward Surage Current


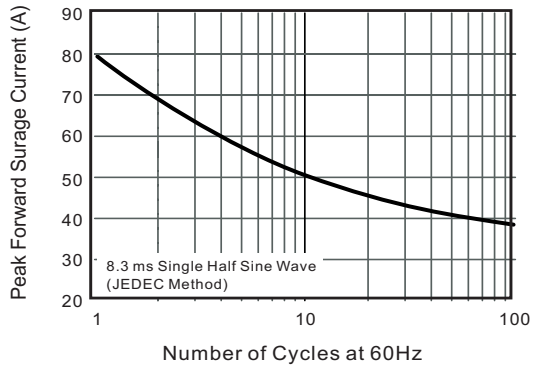


Fig.6- Typical Transient Thermal Impedance

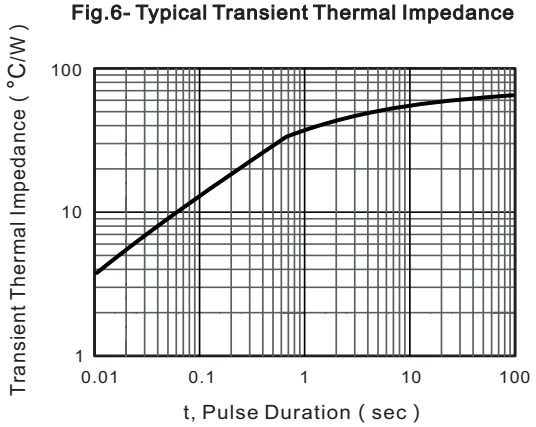

苏州福摩斯